


DATA SHEET

SKY GARDEN 20MM DRAINAGE BOARD WITH FILTER FLEECE DDRD20-1

Version 1.0

SKY GARDEN 20MM DRAINAGE BOARD WITH FILTER FLEECE

Rigid drainage board manufactured from HDPE. Combined function as a water-retention, drainage and filtration layer. Rigid sheet with integrated Polypropylene filter layer. Studded HDPE sheets contains perforations to drain surplus water and high capacity dimples (height c.20mm) for water retention. High compressive strength (115kPa). Delivery and installation according to Sky Garden instruction. Product arrives in 48.5 m2 size rolls.

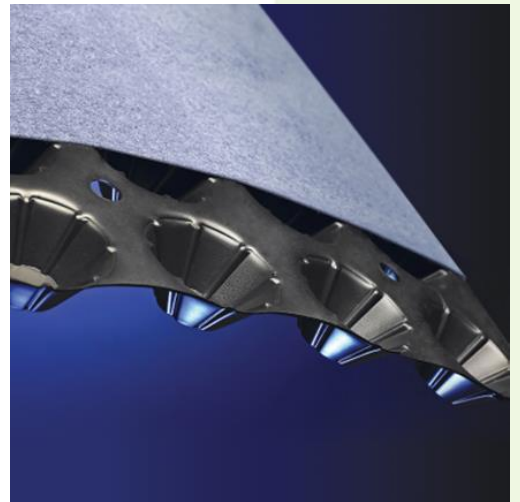

TECHNICAL DATA

	Test	Unit	Mean Values		
Mechanical Properties - Geocomposite					
Compressive Strength	EN ISO 25619-2	kPa	115		
Tensile Strength (MD/CMD)	EN ISO 10319	kN/m	17		
Static Puncture	EN ISO 12236	kN	2.6		
Hydraulic Properties - Geotextile					
Water Permeability vH50	EN ISO 11058	l/(m2·s)	100		
Apparent Opening Size	EN ISO 12956	µm	80		
Hydraulic Properties - Geocomposite					
Water Flow Capacity In The Plane (Rigid/Rigid)	EN ISO 12958	l/(m2·s)	(i=1)	(i=0.5)	(i=0.1)
at 20kPa			10.0	8.0	5.0
at 100kPa			9.0	6.0	3.5
at 200kPa			5.0	2.0	1.0
Water Storage Capacity		l/m2	4.0		
Water flow Through Perforations	EN ISO 11058	l/(m2·s)			
Physical Properties					
Thickness at 2kPa	EN ISO 9836-1	mm	21		
Standard Colour			Black		
Perforations per m2			49		
Perforations diameter		mm	10		
Polymer - Cuspate			HDPE		
Polymer - Textile			PP		
Dimensions					
Standard Roll Length		m	50		
Standard Roll Width		m	0.97		
Approximate Roll Weight		kg	60		



T 01242 620905
E enquiries@sky-garden.co.uk

Head Office

Unit 3, Miller Court
Tewkesbury, Gloucestershire,
GL20 8DN

01242 620905

London Office

Kemp House,
152 City Road,
London. EC1V 2NX

02035 030927

